




Series
TEFG

Molded PVDF Gage

One Piece Mold With All PVDF Body and Diaphragm

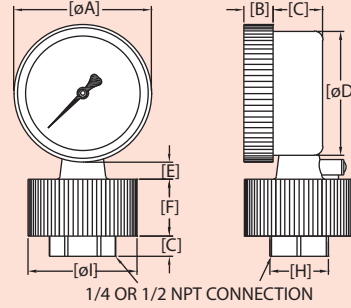

Size		ϕA	B	C	ϕD	E	F	G	H	I
2-1/2" DIAL	in	2-57/64	5/8	1-3/64	2-39/64	1/2	1-3/16	7/16	1-15/64	2-19/64
	mm	73.44	15.80	26.47	66.36	12.82	30.36	10.99	31.28	58.29

The Series TEFG Molded PVDF Gages possess dual psi and bar (100 x kPa) scales with 1.5% full scale accuracy. The 2.5" TEFG gages are designed with a one piece PVDF mold that makes the unit extremely durable while preventing the chance of a loss of fill. The wetted parts include the PVDF connection and PVDF diaphragm. Units can withstand temperatures of -4 to 140°F (-20 to 60°C). A wide offering of ranges are available from 15 to 200 psi. Units come with a 1/4" or 1/2" female NPT bottom connection. TEFG gages are ideal for water treatment and chemical feed systems.

Model Number		Range
1/2"	1/4"	
TEFG-D10224F	TEFG-D10222F	0-15 psi (1 bar)
TEFG-D10324F	TEFG-D10322F	0-30 psi (2 bar)
TEFG-D10424F	TEFG-D10422F	0-60 psi (4 bar)
TEFG-D10524F	TEFG-D10522F	0-100 psi (7 bar)
TEFG-D10624F	TEFG-D10622F	0-150 psi (11 bar)
TEFG-D10724F	TEFG-D10722F	0-200 psi (14 bar)

SPECIFICATIONS


- Service:** Compatible gases and liquids.
- Wetted Materials:** PVDF.
- Housing:** One piece molded anti-impact PVDF.
- Lens:** Heavy duty glass.
- Accuracy:** 1.5% full scale.
- Pressure Limit:** 110% of full scale.
- Temperature Limit:** -4 to 140°F (-20 to 60°C).
- Size:** 2.5" (63 mm).
- Process Connection:** 1/4" or 1/2" female NPT lower.
- Weight:** 14.72 oz (417 g).



Series
PPG

Molded Polypropylene Gage

One Piece Mold With Polypropylene Body and Fluoroelastomer Diaphragm



Size		ϕA	B	C	ϕD	E	F	G	H	I
2-1/2" DIAL	in	2-57/64	5/8	1-3/64	2-39/64	1/2	1-3/16	7/16	1-15/64	2-19/64
	mm	73.44	15.80	26.47	66.36	12.82	30.36	10.99	31.28	58.29

The Series PPG Molded Polypropylene Gages possess dual psi and bar (100 x kPa) scales with 1.5% full scale accuracy. The 2.5" PPG gages are designed with a one piece Polypropylene mold that makes the unit extremely durable while preventing the chance of a loss of fill. The wetted parts include the Polypropylene connection and Fluoroelastomer diaphragm. Units can withstand temperatures of -4 to 140°F (-20 to 60°C). A wide offering of ranges are available from 15 to 200 psi. Units come with a 1/4" or 1/2" female NPT bottom connection. PPG gages are perfect for water treatment and chemical feed systems.

Model Number		Range
1/2"	1/4"	
PPG-D10224F	PPG-D10222F	0-15 psi (1 bar)
PPG-D10324F	PPG-D10322F	0-30 psi (2 bar)
PPG-D10424F	PPG-D10422F	0-60 psi (4 bar)
PPG-D10524F	PPG-D10522F	0-100 psi (7 bar)
PPG-D10624F	PPG-D10622F	0-150 psi (11 bar)
PPG-D10724F	PPG-D10722F	0-200 psi (14 bar)

SPECIFICATIONS

- Service:** Compatible gases and liquids.
- Wetted Materials:** Connection: Polypropylene; Diaphragm: Fluoroelastomer.
- Housing:** One piece molded Polypropylene.
- Lens:** Heavy duty glass.
- Fill:** Glycerin.
- Accuracy:** 1.5% full scale.
- Pressure Limit:** 110% of full scale.
- Temperature Limits:** -4 to 140°F (-20 to 60°C).
- Size:** 2.5" (63 mm).
- Process Connection:** 1/4" or 1/2" female NPT lower.
- Weight:** 12.16 oz (345 g).